



SHRINK FILM
PETG

High-end film for a better world

How oriented contributes to global megatrends

Urbanisation

Safety

Digitalisation

Globalisation

Mobility

Health

Environmental protection



Individualized packaging
& product differentiation



Individualized packaging
possibilities with 360°
design possibilities



Tamper-evident solutions
for product safety





Density reduction enables
separation of label and
container for recyclability

Shrink film

Lines and components according to your requirements

Sequential

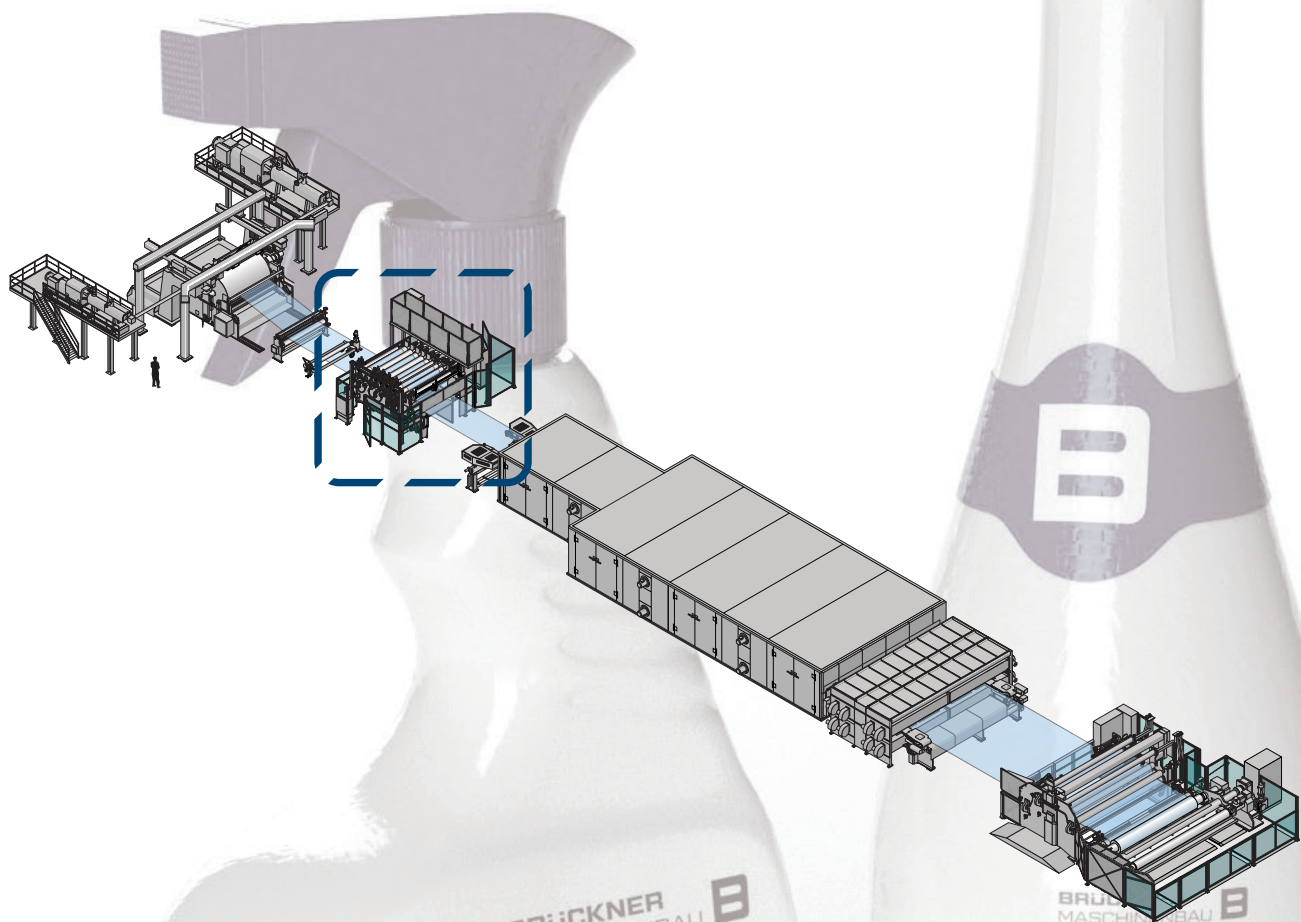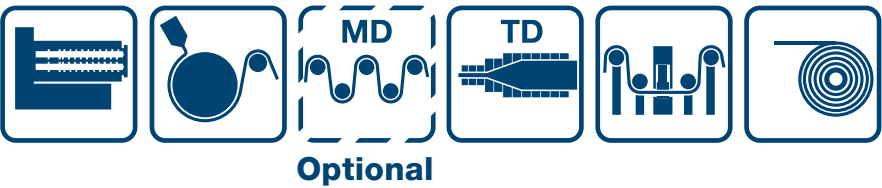

Line types

Material	--	PETG		PO
Working width	[m]	6.2	8.7	
Layer	--	3/5		upon request
Annual output (7,500 h/a)	metric tons	17,300	22,500	
Thickness range	[µm]	20 - 80		
Production speed	m/min	120		

360° design possibilities with shrink range up to 70%

Low, medium & high shrink films for individualized shrink labels



Benefits



360° information & design possibilities



High shrink range
up to 70%



Product safety
tamper evidence



Downgauging
less material required



STRETCHING THE LIMITS